

Trax90

Design:
DB Studio



Caratteristiche tecniche Trax90

Technical specifications / caractéristiques techniques / technische eigenschaften / технические характеристики

Gres porcellanato smaltato, rettificato - Porcelain gres glazed, rectified - Grès porcelainé émaillé, rectifié - Glasiertes Feinsteinzeug, entgratet - керамогранит Эмалированная, ректифицированные

ISO 13006 - UNI EN 14411 Annex G Bla GL

Spessore - Thickness 10 mm	CARATTERISTICHE TECNICHE TECHNICAL SPECIFICATIONS	METODI DI PROVA NORMA ISO STANDARD	VALORI PRESCRITTI DALLE NORME INTERNATIONAL STANDARDS UNI EN 14411 - ISO 13006		PRESTAZIONI PERFORMANCES	
	LATI SIDES СТОРОНЫ	ISO 10545-2	± 0,6%	±2.0 mm	CONFORME COMPLIANT УСТУПЧИВЫЙ	
	SPESSORE THICKNESS ТОЛЩИНА		± 5%	±0.5 mm	CONFORME COMPLIANT УСТУПЧИВЫЙ	
	RETTILINEITÀ DEGLI SPIGOLI STRAIGHTNESS OF EDGES ПРЯМОЛИНЕЙНОСТЬ КРОМОК		± 0,5%	±1.5 mm	CONFORME COMPLIANT УСТУПЧИВЫЙ	
	ORTOGONALITÀ RECTANGULARITY ОРТОГОНАЛЬНОСТЬ		± 0,5%	±2.0 mm	CONFORME COMPLIANT УСТУПЧИВЫЙ	
	PLANARITÀ SURFACE FLATNESS ПЛОСКОСТНОСТЬ		± 0,5%	±2.0 mm	CONFORME COMPLIANT УСТУПЧИВЫЙ	
	ASSORBIMENTO D'ACQUA WATER ABSORPTION ПОГЛОЩЕНИЕ ВОДЫ	ISO 10545-3	≤ 0,5%		CONFORME COMPLIANT УСТУПЧИВЫЙ	
	RESISTENZA ALLA FLESSIONE BENDING STRENGTH ПРОЧНОСТЬ НА ИЗГИБ	ISO 10545-4	≥ 35N/mm ²		≥ 35N/mm ²	
	MODULO DI ROTTURA MODULUS OF RUPTURE МОДУЛЬ РАЗРУШЕНИЯ	ISO 10545-4	> 1300N (sp. ≥ 7,5mm)		≥ 1300N	
	RESISTENZA ALL'ABRASIONE SUPERFICIALE PER LE PIASTRELLE SMALTATE RESISTANCE TO SURFACE ABRASION FOR THE ENAMELED TILES СТОЙКОСТЬ К ПОВЕРХНОСТНОМУ ИСТИРАНИЮ ЭМАЛИРОВАННОЙ ПЛИТКИ	ISO 10545-7			DISPONIBILE SU RICHIESTA AVAILABLE ON REQUEST	
	RESISTENZA AGLI SBALZI TERMICI RESISTANCE TO THERMAL SHOCKS	ISO 10545-9	METODO DISPONIBILE AVAILABLE METHOD		RESISTE RESISTANT	
	RESISTENZA AL GELO FROST RESISTANCE МОРОЗОСТОЙКОСТЬ	ISO 10545-12	METODO DISPONIBILE AVAILABLE METHOD ДОСТУПНЫЙ МЕТОД		RESISTE RESISTANT СТОЙКАЯ	
	RESISTENZA AI PRODOTTI CHIMICI USO DOMESTICO E ADDITIVI PER PISCINA- RESISTANCE TO HOUSEHOLD AND SWIMMING POOL CHEMICAL PRODUCTS - СТОЙКОСТЬ К ДЕЙСТВИЮ БЫТОВЫХ ХИМИЧЕСКИХ СРЕДСТВ, ДОБАВКАМ В БАССЕЙНЫ	ISO 10545-13	min. B		CONFORME COMPLIANT УСТУПЧИВЫЙ	
	RESISTENZA ALLE MACCHIE STAIN RESISTANCE СТОЙКОСТЬ К ОБРАЗОВАНИЮ	ISO 10545-14	minimum classe 3		CONFORME COMPLIANT УСТУПЧИВЫЙ	
					HARD	SOFT
	RESISTENZA ALLO SCIVOLAMENTO SKID RESISTANCE	AUSTRALIAN PENDULUM			37	
		DIN 51130			R11	R10
		DIN 51097			A+B+C	A+B

I valori riflettono una media tra diversi test eseguiti secondo le normative di riferimento condotti nei nostri laboratori e/o presso centri di analisi esterni certificati. I valori di singole produzioni possono variare. / Values are based on an average of the results of various tests, which, according to required standards, have been conducted in our certified laboratories or external dedicated centers. Values of each individual production may vary.

Alcune impurità e puntature visibili nei colori chiari sono da considerarsi una caratteristica tecnica del prodotto. Some light impurities and dots must be considered as a standard feature of the product.

DECORATORI®
BASSANESI
ITALIA ■ 1988

Caratteristiche tecniche Trax90

Technical specifications / caractéristiques techniques / technische eigenschaften / технические характеристики

Le nostre lastre sono sempre rettificate e hanno dimensioni finali in mm come da tabella.
Fuga minima consigliata 2 mm.

Nos plaques sont toujours rectifiées et ont des dimensions finales en mm comme suivant le tableau.
Joint minimum conseillé 2 mm.

Наши плиты всегда обрезаны и имеют конечные размеры, в миллиметрах, указанные в таблицах.
рекомендуемый минимальный шов 2мм


Our slabs are always rectified and the table below indicates their final size in mm.
The minimal recommended joint spacing is 2mm

Unsere Platten sind immer geschliffen und haben endgültige Abmessungen in mm entsprechend der Tabelle. Empfohlene Mindestfuge 2 mm

Formato nominale (cm) - Nominal size (cm) - Format nominal (cm) Nominales Format (cm) - Номинальный форма (см)	Formato rettificato (mm) - Rectified size (mm) - Format rectifié (mm) Geschliffenes Format (mm) - Обрезной формат (мм)
90x90	900x900
45x90	449x900

Stucco Consigliato/ Recommended Filling / Plâtre Conseillé / Empfohlene Fugenmasse / Рекомендованная Затирка

	KERAKOLL FUGABELLA COLOR
Cotton	43
Camel	43
Ash	09
Slate	10

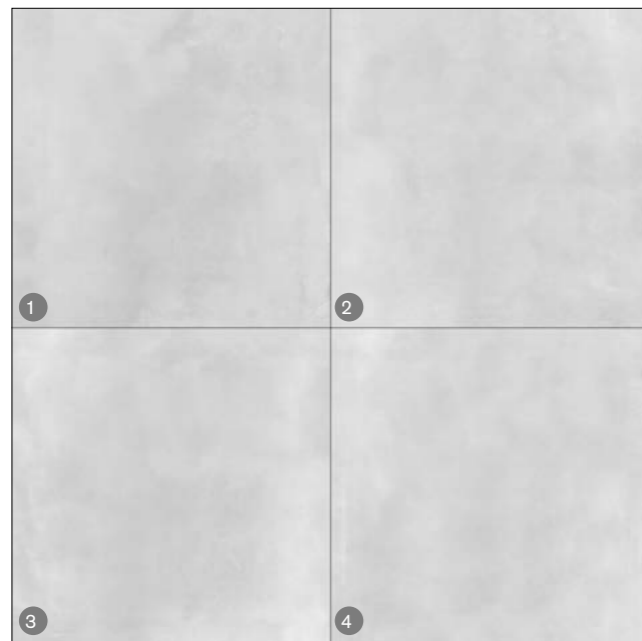

La finitura soft è realizzata in 4 facce diverse
The soft finish is created in 4 different faces
La finition soft est réalisée dans 4 faces différentes.
Das Soft-Finish wird in 4 verschiedenen Ausführungen hergestellt
Отделка soft выполнена на 4 различных поверхностях



La finitura hard è realizzata in 3 facce diverse
The hard finish is created in 3 different faces
La finition hard est réalisée dans 3 faces différentes.
Das Hard-Finish wird in 3 verschiedenen Ausführungen hergestellt
Отделка hard выполнена на 3 различных поверхностях

Per ulteriori informazioni visita il nostro sito: www.decoratoribassanesi.it - For further information visit: www.decoratoribassanesi.it - Pour plus d'informations, visitez notre site : www.decoratoribassanesi.it
Für weitere Informationen besuchen Sie unsere Webseite: www.decoratoribassanesi.it - Для получения дополнительной информации посетите: www.decoratoribassanesi.it